



REV:	DESCRIPTION	BY	DATE

PIN	接口定义
1	NC
2	PSB
3	CSB
4	NC
5	NC
6	NC
7	NC
8	NC
9	V/G
10	NC
11	NC
12	XVD
13	V/D
14	NC
15	NC
16	VSS
17	V/DD
18	D7
19	D6
20	D5
21	D4
22	D3
23	D2
24	D1
25	D0
26	/RD
27	/WR
28	AD
29	RST
30	CS

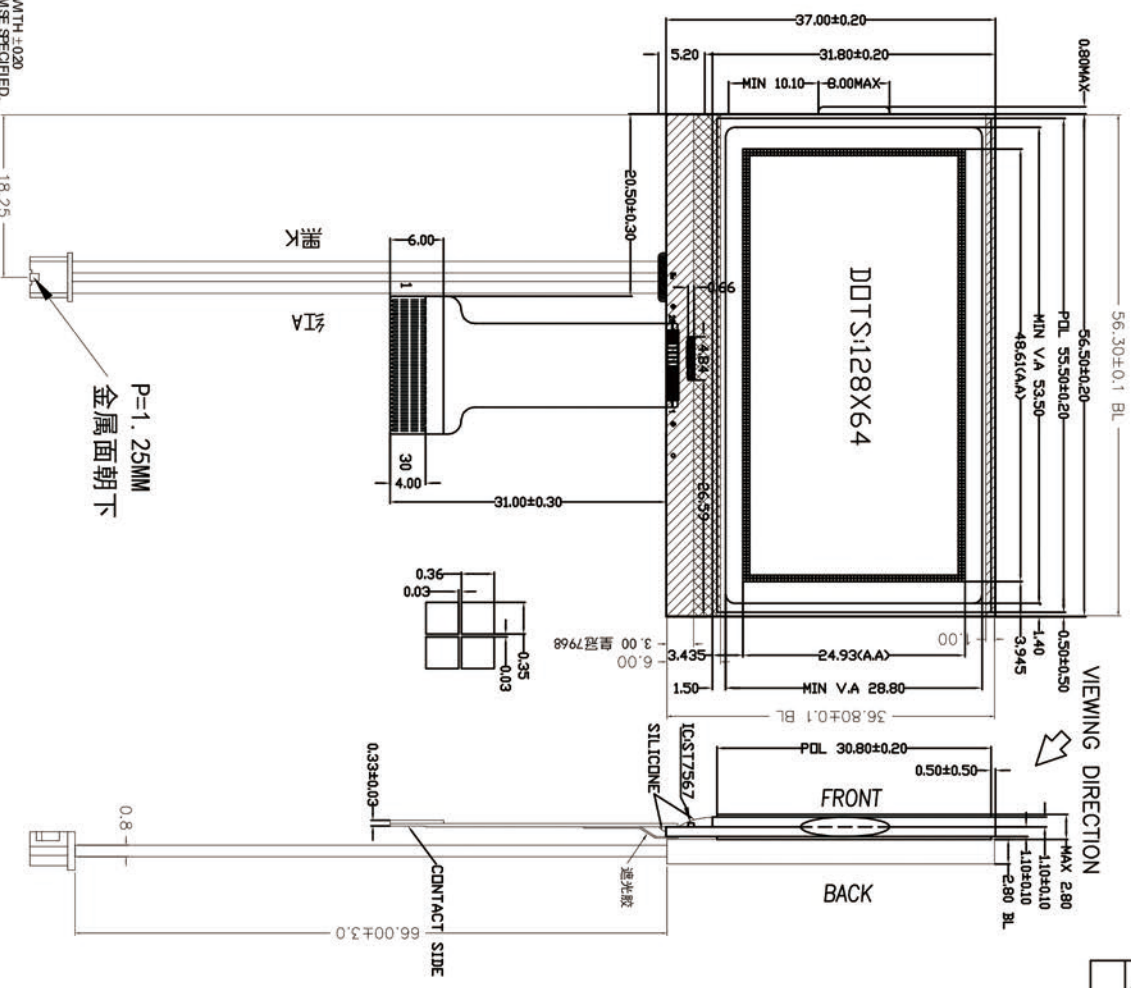

- NOTES
- ALL DIMENSIONS ARE IN mm, WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED.
1. DISPLAY TYPE: FSTN/POSITIVE
 2. LCD OPERATING VOLTAGE: 90V/VDD=3.0V
 3. OPERATING TEMPERATURE: -20°C ~ 70°C
 4. STORAGE TEMPERATURE: -30°C ~ 80°C
 5. DRIVE MODE: 1/6DUTY 1/9BIAS
 6. VIEWING DIRECTION: 1200
 7. POLARIZER TYPE: TRANSPARENT
 8. CONNECTOR: COG+PROS(7587)
 9. Backlight: WHITE
 10. Rolye requirement

TCC LCD Hi-Tech Co., Ltd.

SHEET: 1 of 3

APPROVALS: _____ DATE: _____

DWN: LH Liu 2017-1-13

CHK: _____

APP: _____

LCD NUMBER: SYG12864017

SCALE: _____ UNITS: MM

GENERAL TOL: ± 0.2

DO NOT SCALE THIS DRAWING.