
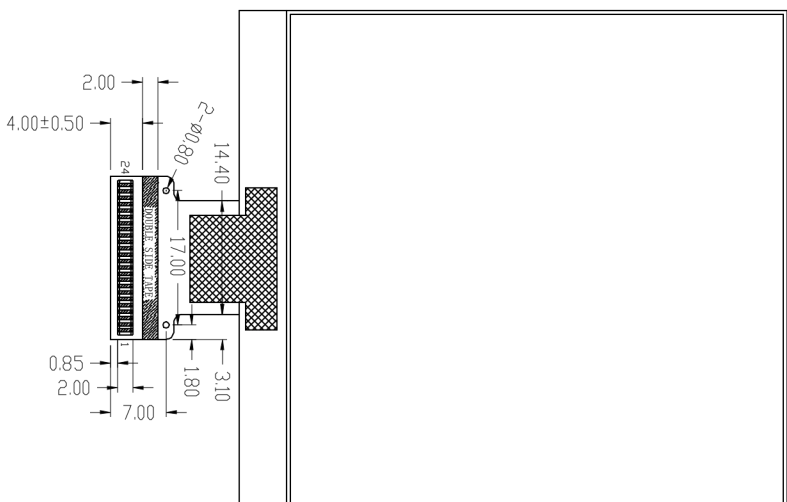



SYMBOL	REVISION	CONTENT	DATE
	G-1	NEW	11.02.19
	G-2	CHANGE UV TAPE	11.04.19

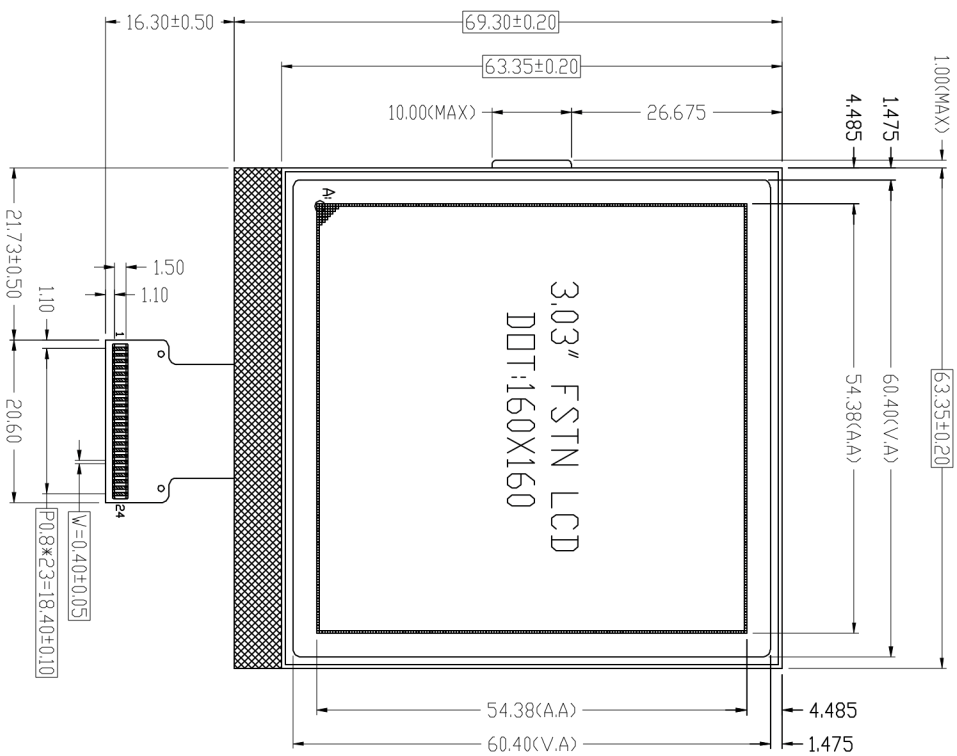

PIN	NO.
VLCD	1
VS+	2
VS-	3
VB0-	4
VB1-	5
VB1+	6
VB0+	7
VDD	8
VSS	9
ID1	10
ID0	11
BM1	12
BM0	13
CS1	14
CS0	15
CD	16
WR	17
RST	18
SCK	19
DATA1	20
SDA	21
DATA2	22
DBI3	23
DBI5	24

DETAILS A:

SCALE: (5:1)



- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSPARENT/POSITIVE
 4. DRIVE METHOD: 1/160 DUTY 1/10 BIAS
 5. LCD OPERATING VOLTAGE: 16.5V, VRECOMMEND: VDD=3.3V
 6. OPERATING TEMP: -30°C~+80°C
 7. STORAGE TEMP: -40°C~+90°C
 8. CONNECTOR: PPC
 9. IC: UC1698UGAC
 10. BACKLIGHT: WITHOUT BACKLIGHT
 11. UNMARKED TOLERANCE: ±0.3mm
 12. THE CONTROLLED DIMENSION MASK TO BE: □
 13. REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS



深圳市三元晶科技有限公司
Shenzhen TCCLCD Hi-Tech Co., Ltd

DRAWN BY:	SYG160160P	UNIT: mm
ME CHECKED BY:		
EE CHECKED BY:		
APPROVED BY:		
DWG NO:		
SCALE:		
SHEET NO:	1	OF 1