
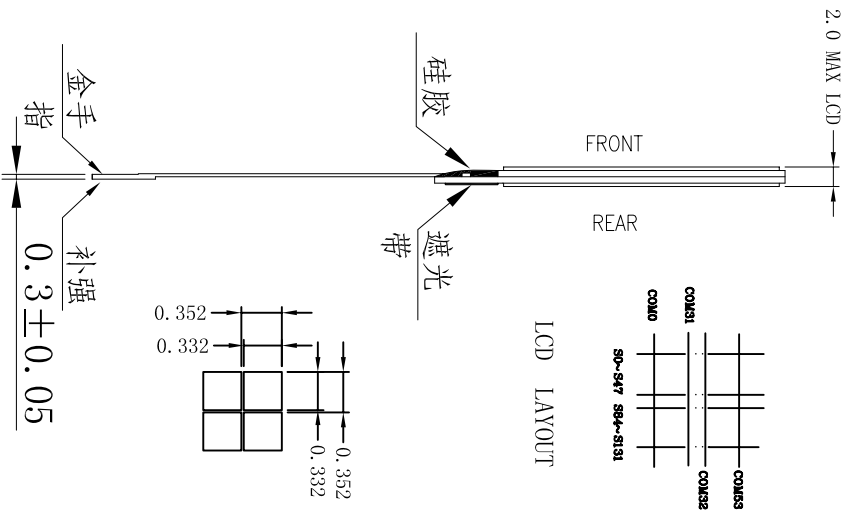



Customer approval :

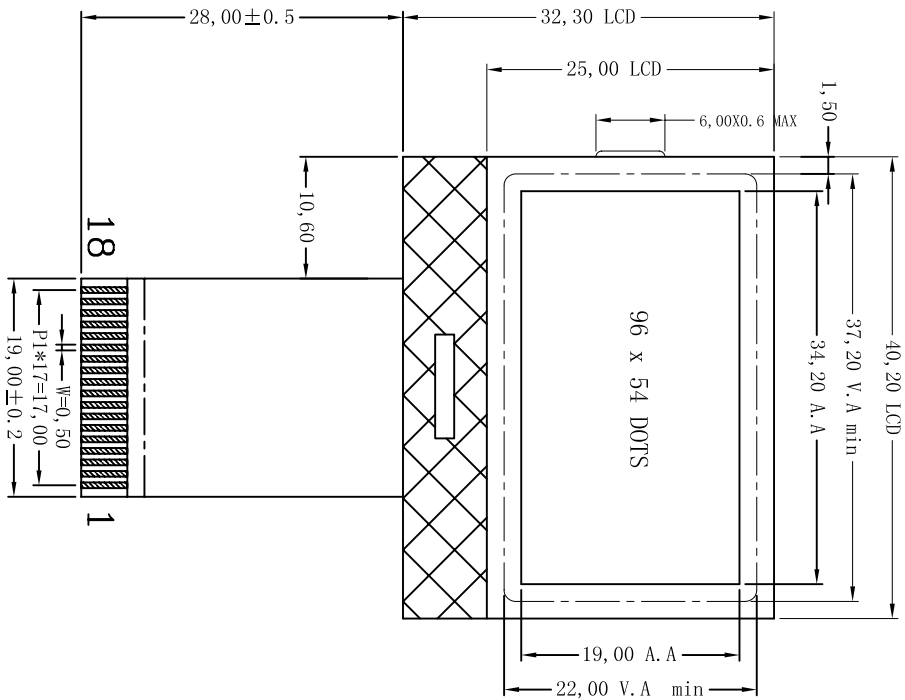

PIN	SYMBOL
1	/CS
2	/RES
3	A0
4	SCK
5	SDA
6	VSS
7	NC
8	NC
9	V0
10	XV0
11	NC
12	NC
13	VDD
14	VG
15	NC
16	NC
17	NC
18	NC

SPECIFICATION:

- 1). Driving: Dots : 96*54, DUTY:1/64, BIAS:1/9, Vop:8.7V, VDD:2.8V-3.3V
- 2). Viewing angle : 12.0° CLOCK
- 3). Display mode : FSTN/POSITIVE/TRANSPARENT
- 4). Operating temp: -20° C~+70° C
Storage temp : -30° C~+80° C
- 5). Controller IC : ST7567
- 6). Backlight : NO
- 7). Dimensions with mark "*" are important,
with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant

REVISION RECORD		REV	
First issue	A0		
DRAWING NO.		SYCG965401	
APPROVED BY	CHECKED BY	深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.	
		DRAWING BY	Jany
		DATE	2013/06/04
GENERAL TOL:		UNIT:	mm
		PAGE	1/1